

BETA BETA SERIES Powerful Lift

Two post lift top connection




4500 KG

5500 KG

BETA 45/55

Line Drawing

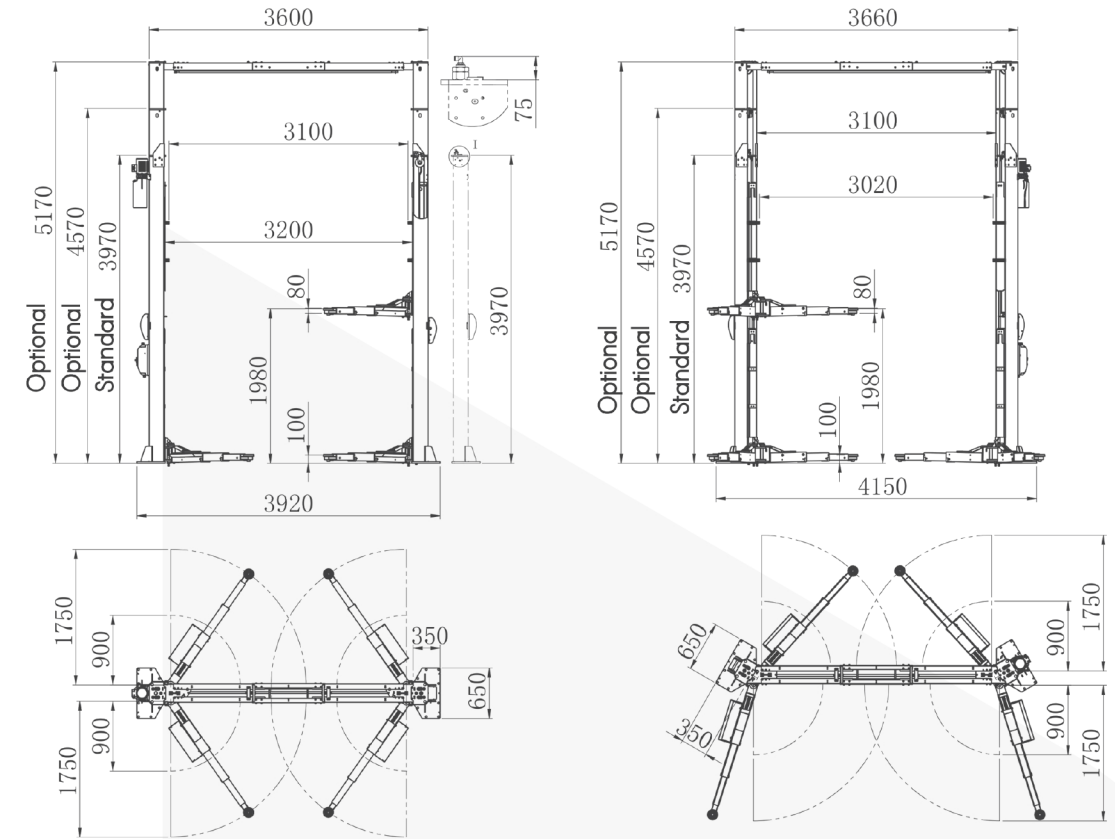

Highlights

- Each group of main cylinders are equipped with a parachute valve to ensure safety. Nylon slide pads, long life-used, Maintenance free for its lifetime. Two installation ways make it easy to open car doors.
- Environment-friendly and low noise design. Equipped with 600mm column extension frame and 1200mm column extension frame. Two different column extensions for different space options. The column adopts an 8-fold bending structure and built-in reinforcement to maximize the column strength. Unique electro locking system is designed without defect.
- Base plate thickness is 20mm, Support arm thickness is 6/8mm. Parachute valve inside the cylinder ensures user safety. The door anti-collision rubber protection is put on the carriage and support arm to facilitate the entry and exit from the vehicle. The length of carriage is 1.8m. Vulcanized rubber pad has long life.
- Each lift passes the test of 115% dynamic load and 150% static load, safe and reliable.
- Bright's lift is equipped with product liability insurance.

Technical

	45	55
Capacity	4500kg	5500kg
Lifting time	40s	40s
Lowering time	40s	40s
Motor	380V 3kw 3Ph 50Hz-60Hz	380V 3kw 3Ph 50Hz-60Hz
Lifting height	1980mm	1980mm
Minimum height	100mm	100mm
Total width	3920/4150mm	3920/4150mm
Total weight	1150Kg	1200Kg

